VER	DETIAL DISCRIPTION	DATE
1	The First Ammendment	2015-06-04
2	The FPC Length Add 8mm	2015-06-29

客户确认签名/ Customer signature	

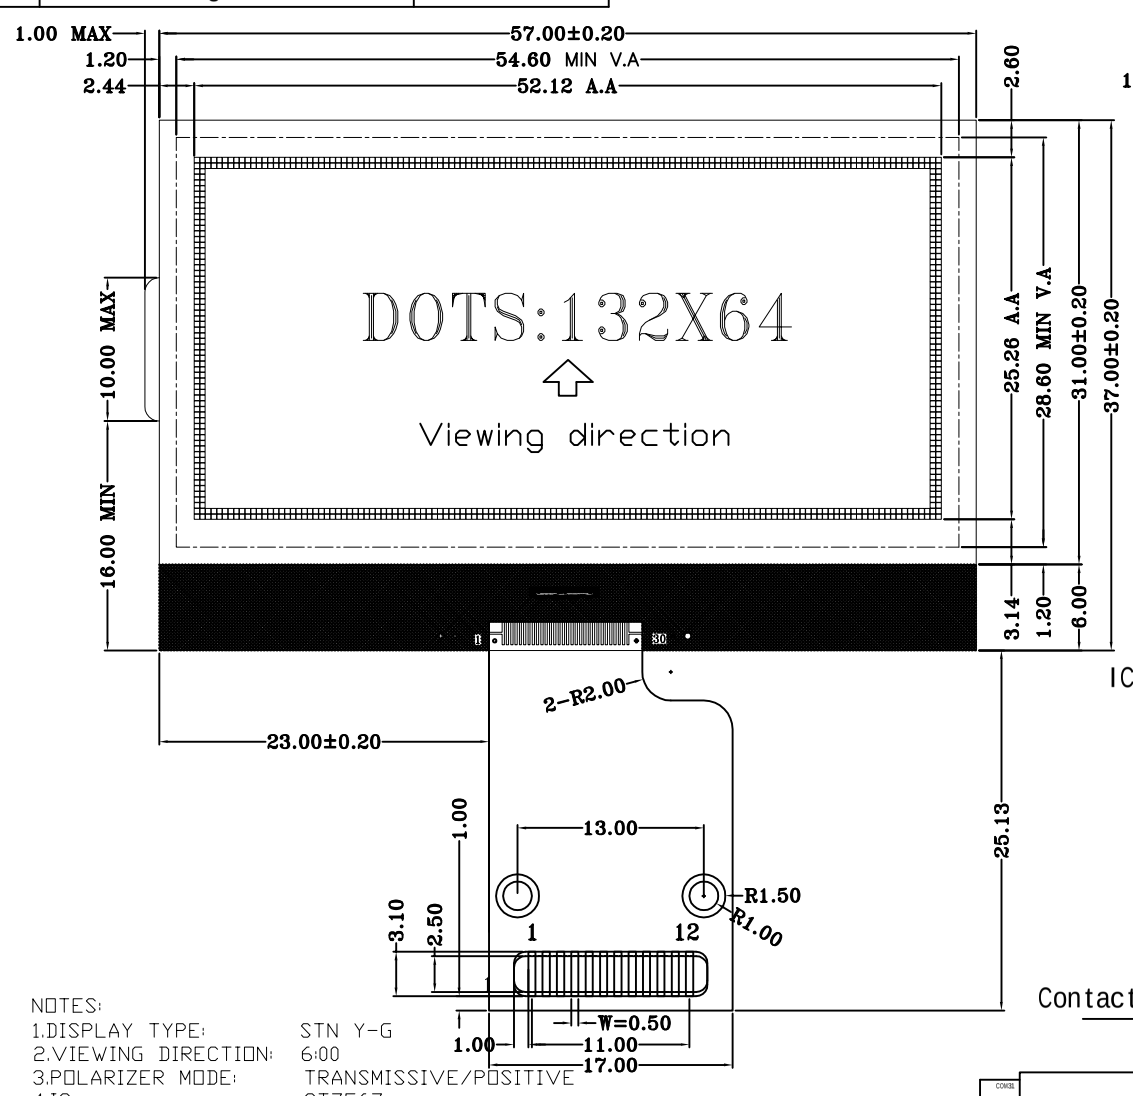

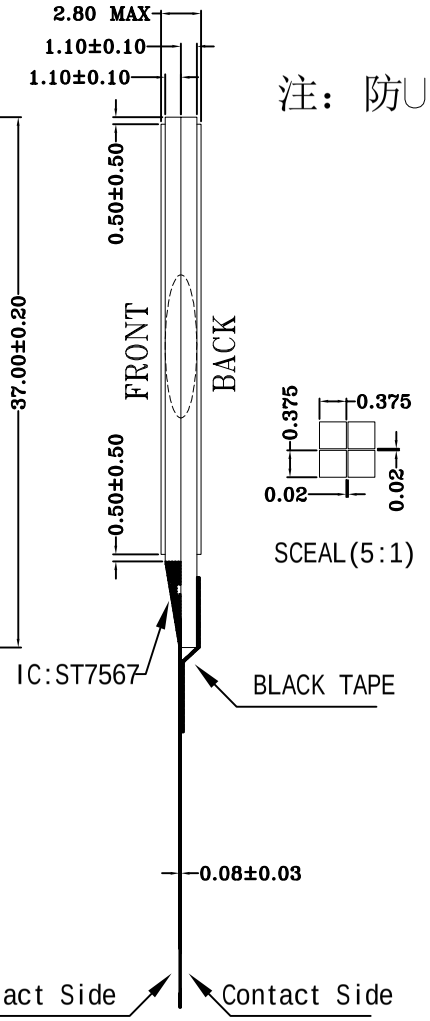

注：防UV

PIN ASSIGNMENT:		Example(串口)
1	VG	
2	NC	NC/0V
3	NC	NC/0V
4	XVO	C=1UF
5	V0	
6	VSS	
7	VDD	+3.0V
8	D7	P1.7
9	D6	P1.6
10	A0	P3.2
11	RSTB	P3.1
12	CSB	P3.0

NOTES:
1.DISPLAY TYPE: STN Y-G
2.VIEWING DIRECTION: 6:00
3.POLARIZER MODE: TRANSMISSIVE/POSITIVE
4.IC: ST7567
5.OPERATING TEMP: -20°C-+70°C
6.STORAGE TEMP: -30°C-+80°C
7.Drive Mothod: 1/64duty 1/9bias
8.LCD OPERATING VOLTAGE: VDD=3.3V,Vop=8.5V
9.CONNECTOR: COG/FPC
10.UNMARKED TOLERANCES: ±0.3mm
11.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



WAYING（HONGKONG） SHARES LIMITED	
名称	FOG工程图
编号	WYM13264K1
版本	1.0
绘图	PGY
审批	HWX
日期	2015-06-29