
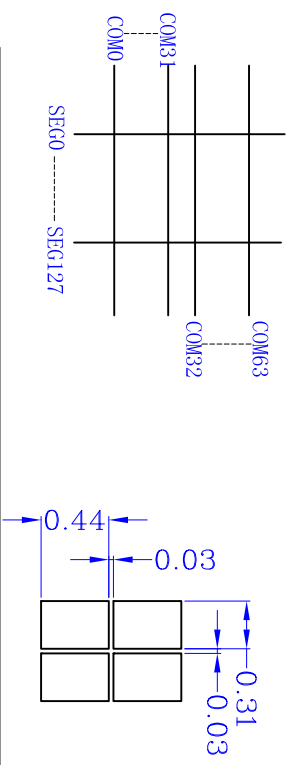
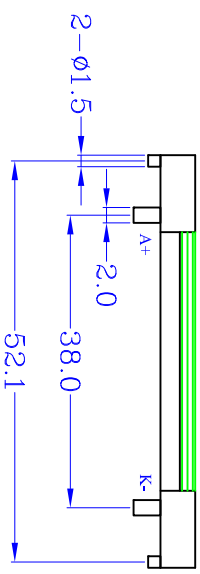


| | |
|----|----------|
| 30 | /CS |
| 29 | /RST |
| 28 | A0 |
| 27 | /MR(R/W) |
| 26 | /RD(E) |
| 25 | DB0 |
| 24 | DB1 |
| 23 | DB2 |
| 22 | DB3 |
| 21 | DB4 |
| 20 | DB5 |
| 19 | DB6(SCT) |
| 18 | DB7(SCT) |
| 17 | VDD |
| 16 | VSS |
| 15 | VOUT |
| 14 | C3P |
| 13 | C1N |
| 12 | C1P |
| 11 | C2P |
| 10 | C2N |
| 9 | V4 |
| 8 | V3 |
| 7 | V2 |
| 6 | V1 |
| 5 | V0 |
| 4 | VR |
| 3 | C86 |
| 2 | P/S |
| 1 | IRS |

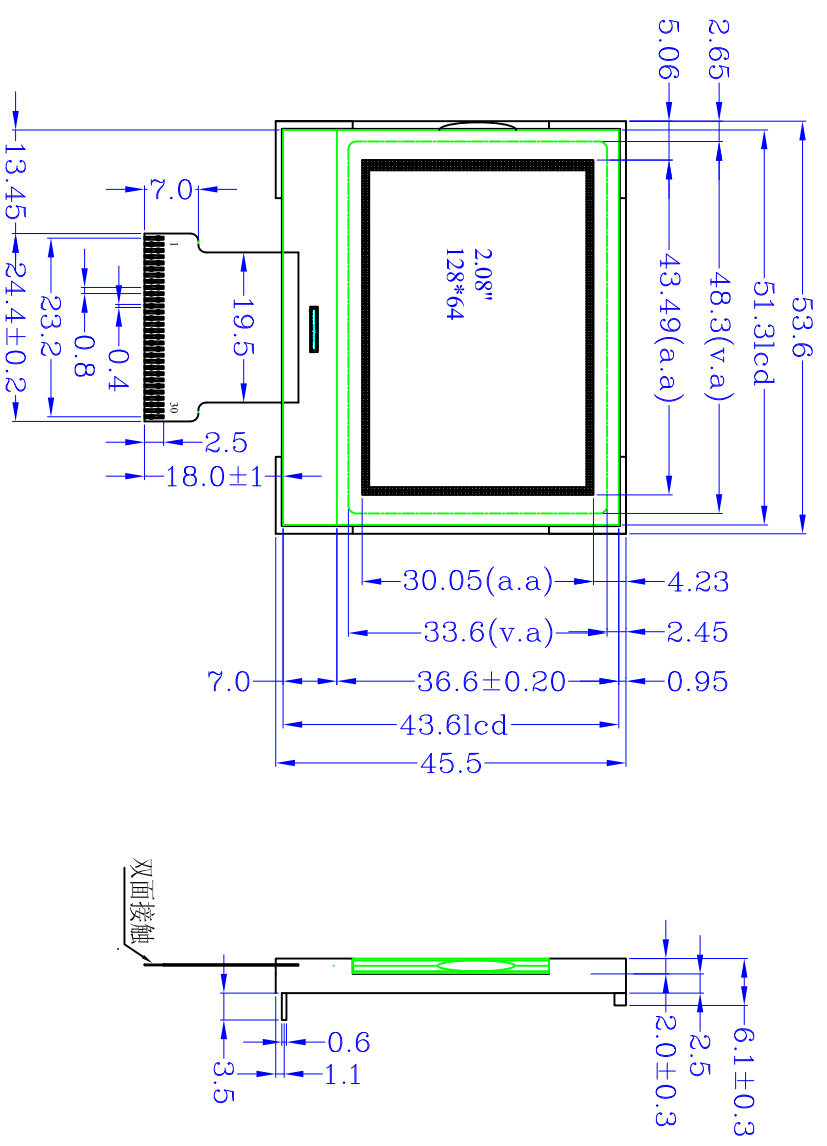

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7565R
 9. BACKLIGHT TYPE: YELLOW-GREEN
 10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

| | |
|---|---------------|
| WAYING (HONGKONG) SHARES LIMITED | |
| DESIGN: | MODEL NUMBER: |
| CHECK: | WYM12864K14G |
| APPROVE: | VERSION: A |
| | |
| SHEET: 1 OF 1 | |
| DATE: 2012-06-25 | |

Unspecified tolerances are ±0.3