

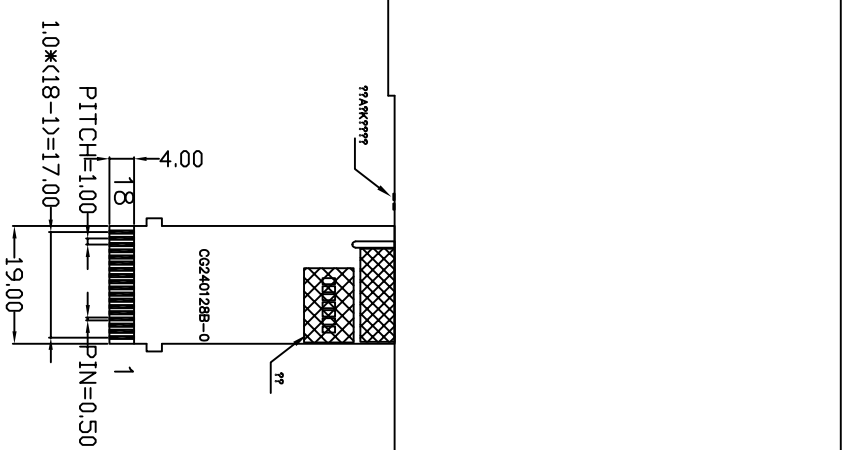
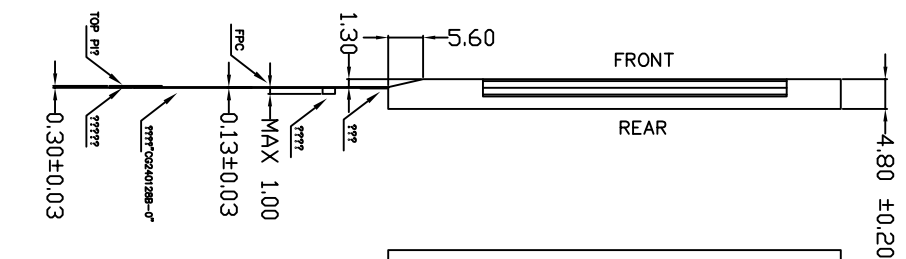


VER	DETAIL DISCRPTION	DATE
△	The First Amendment	2016 01 06


客户确认签名

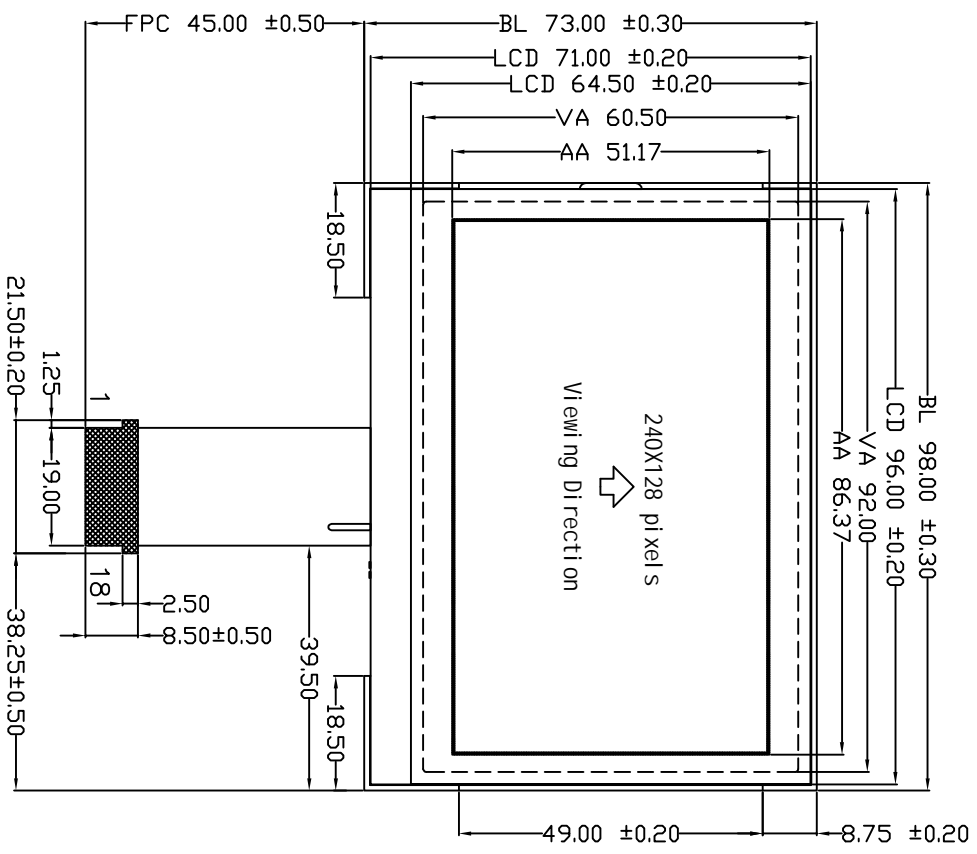

CON1	SYMBOL	
1	GND	NC
2	P	NC
3	NC	
4	GND	
5	VDD	← 3.3V
6	D3(SDA)	P1.3
7	D0(SCK)	P1.0
8	D/C	P3.2
9	RST	P3.1
10	CS	P3.0
11	NC	
12	LEDA	
13	LEDA	
14	LEDK	
15	LEDK	
16	GND	
17	GND	
18	P	NC

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	3.3V	OPERATING TEMP	-20°C ? 70°C
OPERATING CURRENT	2.0MA(MAX)	STORAGE TEMP	-30°C ? 80°C
LCD DRIVE VOLTAGE		BACKLIGHT	SCHIPS(WHITE), VF=3.0V, IF<75MA
DISPLAY MODE	STN Blue Negative Transmissive	STANDARDS	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
LCD DRIVE METHOD	DUTY?1/128; BIAS?1/12	CONNECTOR TYPE	FPC
LCD DRIVE IC	UC1608	OTHER	--
VIEW DIRECTION	6:00 O'CLOCK		

BACK LIGHT CIRCUIT



 WAYING (HONGKONG) SHARES LIMITED	
名称	LCM工程图
编号	W/YM240128K8
版本	1.0
绘图	PGY
审批	YXS
日期	2016 01 06